


**WIRELESS-MICROPHONE SYSTEMS**  
**PSS 902 - MAINS POWER-SUPPLY MODULE**

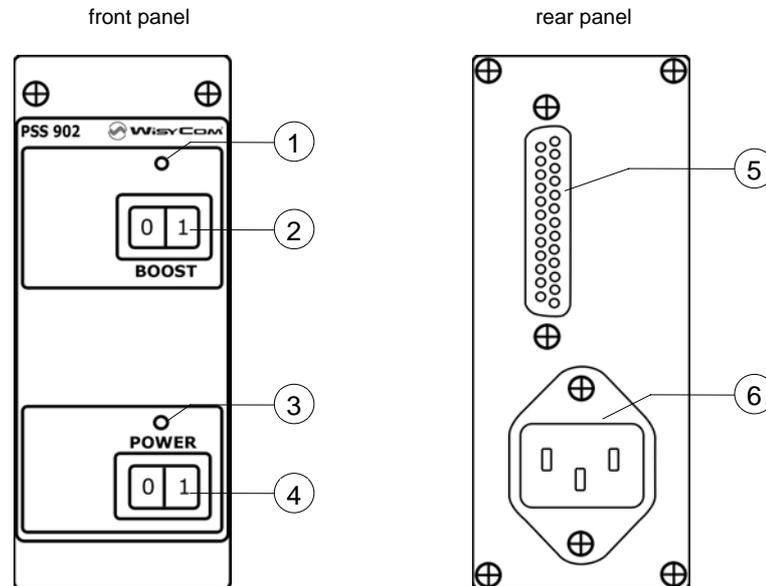

- 1) LED INDICATION: ACTIVE ANTENNAS POWERING (yellow Led)  
The Led is on when the active antennas are powered.  
When the switch [2] is in "I" position (ON) and the Led turns off in operations or doesn't light, it means that a short-circuit is occurred on the antenna cables. In this case, the dedicated self-resettable protection fuse cuts-off the power.
- 2) ACTIVE ANTENNAS POWER SWITCH
- 3) LED INDICATION: APPARATUS ON (red Led)
- 4) ON/OFF SWITCH
- 5) MULTIPOLE CONNECTOR  
output voltages:
  - +12 V / 2,5 A max (general + active antennas feeding)
  - +12 V / 0,5 A max (active antennas feeding)
- 6) MAINS INPUT CONNECTOR (standard = 230 Vac, others on request)

**TECHNICAL SPECIFICATIONS:**

- Mains input : 90 ÷ 264 Vac - 40 VA max.
- Mains fuse : T2A.
- Output : 12Vdc (± 5%) - 2.5 A max.
- Temperature range : -10 ÷ +55 °C.
- Dimensions : 123 x 49 x 318 mm
- Weight : 915 g approx.
- Complies with : EN 61000-3-2  
EN 60950-1