



Quick User Guide

MPR60 Wideband True Diversity IEM/IFB Receiver

3 Antenna A/B
When the MPR turns on, a message will tell you which antennas to use. Check color cap.

- 470-580 MHz
- 580-700 MHz
- 700-852 MHz
- 890-1100 MHz
- 1100-1260 MHz

4 Status/Battery LED

- GREEN: tuned
- RED: alarm (check Info > Alarm)
- BLUE BLINKING: battery charging
- BLUE: fully charged (100%)

5 Save/Sel

When in menu single push to save and confirm selections. Push together with UP button to enter the main MENU.

6 Exit Button

Press to step back in menu.
Press together with SAVE/SEL to run the auto scan.

7 Up

Push to scroll up while in the menu.
Long press it with DOWN to launch a SYNC with a Wisycom transmitter.
TIP: Press up and down arrow together to lock/unlock the knob volume.

8 Down


Short press to scroll down while in the menu. Long press it with EXIT to lock the front panel.

9 Infrared Port

Place your Tx in front of this port with IRDA enabled to sync it.

10 Sensor light

for automatic brightness adjustment




11 Magnetic Connector


5 pin
to recharge battery or connect to Wisycom Manager

12 Battery Compartment

Open by pressing the two side springs while pulling.



Please unfold for full picture

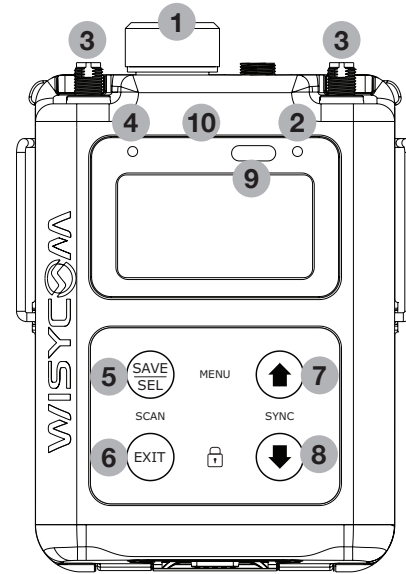

1 Volume Knob


Turn the volume knob to adjust the audio output. Enter in the Advanced > Lock volume menu for lock the level to a fixed value or to a maximum.

2 Audio LED

- RED: audio is muted
- GREEN: audio is enabled (mono signal)
- BLUE: audio is enabled (stereo signal)



Operation Mode: IEM

Select this mode for the reception of a STEREO IEM signal from MTK982, MTK952

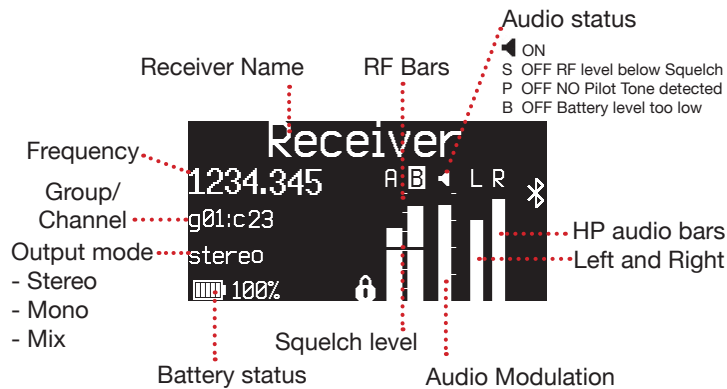

SYNC Procedure

MTK982




- 1 MTK982: push the knob for few seconds.
- 2 MPR60*: press together UP and DOWN ARROW or power on the receiver
- 3 Put the IrDA interface of each device facing each other

The transmitter transfers all relevant information to the receiver:

- Transmitter's name
- Transmitter's Frequency / Group / Channel
- Receiver type (e.g. MPR50-IEM Stereo)




Operation Mode: IFB

Select this mode for the reception of a MONO IFB signal from MTP60, MTP61, MTH610

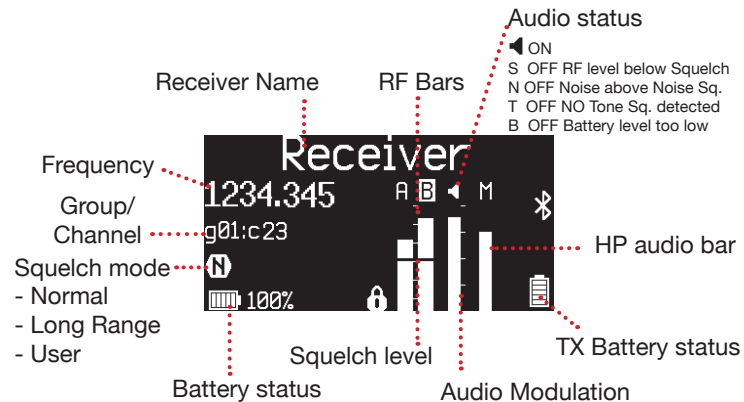

SYNC Procedure

- 1 MTP60: activate IrDA
MTH610/MTP61: activate BT sync
- 2 MPR60*: press together UP and DOWN ARROW or power on the receiver
NOTE: connect antenna A (which is Bluetooth antenna)
- 3 MTP60: put IrDA interface of each device facing each other
MTP61/MTH610: bring the rx and tx closer together (<10cm)



*During the SYNC procedure the MPR60 enable both IrDA and Bluetooth interface.